


SJ9250 RT ROUGH TERRAIN SCISSOR

| Dimensions | SJ9250 RT |
|---|-----------------|
| A Work Height | 56' (17.07 m) |
| B Raised Platform Height | 50' (15.24 m) |
| C Lowered Platform Height | 79" (2.01 m) |
| D Overall Width | 92" (2.34 m) |
| E Overall Length | 176" (4.47 m) |
| F Stowed Height (Rails Up) | 124.5" (3.17 m) |
| G Stowed Height (Rails Down) | 90" (2.29 m) |
| H Platform Width (Inside Dimension) | 74" (1.88 m) |
| I Platform Length (Inside Dimension) | 168" (4.27 m) |

| Specifications | SJ9250 RT |
|--------------------------------------|-----------------------|
| Extension Deck | 5' (1.52 m) |
| Ground Clearance | 8" (0.20 m) |
| Wheelbase | 119" (3.02 m) |
| Weight | 15,200 lbs (6,895 kg) |
| Gradeability | 30% |
| Turning Radius (Inside) | 210" (5.33 m) |
| Turning Radius (Outside) | 301" (7.65 m) |
| Lift Time (With Rated Load) | 67 sec |
| Lower time (With Rated Load) | 72 sec |
| Drive Speed (Stowed) | 2 mph (3.2 km/h) |
| Drive Speed (Raised) | 0.6 mph (1 km/h) |
| Maximum Drive Height | 30' (9.14 m) |
| Capacity (Overall) | 1,500 lbs (680 kg) |
| Local Floor Load (With Rated Load) | 146 psi (1006 kPa) |
| Overall Floor Load (With Rated Load) | 204 psf (10 kPa) |
| Maximum # of Persons | 5 |
| Tire Type | Air Filled |
| Tire Size | 10 x 16.5 |

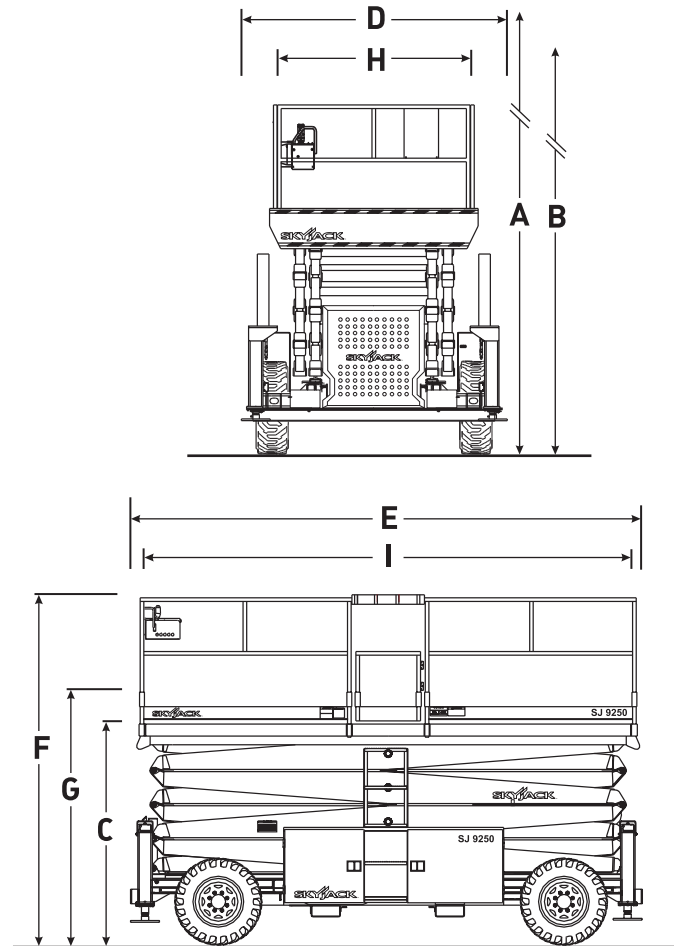

| Model | Capacity With 1 Extension Deck* | | Capacity With 2 Extension Decks* | | |
|---------|---------------------------------|------------------|----------------------------------|------------------|------------------|
| | Main | Front Ext. | Main | Front Ext. | Rear Ext. |
| SJ 9250 | 1,000 lbs (454 kg) | 500 lbs (227 kg) | 500 lbs (227 kg) | 500 lbs (227 kg) | 500 lbs (227 kg) |

Skyjack Head Office
 55 Campbell Rd. Guelph, ON Canada N1H 1B9
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
 Main Switchboard: 1-800-265-2738
 Phone: 519-837-0888
 Fax: 519-837-8104
 Email: skyjack@skyjack.com
 www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. Work platforms have been tested to comply with ANSI and CSA standards as interpreted by Skyjack Inc.

